



TL1 1-R250 LED

Luminaire for recessed installation




- LED energy and maintenance saving
- Luminaire for recessing into solid ceilings
- Robust steel luminaire
- Ingress protection classification IP44/20

Application	For recessed installation in solid ceilings where IP44-rating is required (DP and OP variants)
Design	According to maritime requirements
Housing	Steel housing and steel frame that fits to housing with screws
Finish	Powder coated white RAL9016
Optic	Double prismatic (DP) or Opalac (OP) plastic sheet in steel frame (IP44)
Electric	With electronic driver HF, with analogue dimming HFDa 1-10V or with emergency HF-E8. External battery box to be ordered separately. DALI on request.
Light source	LED 830, 840 or 850 on request
Mounting	To be installed in ceiling cut out with adjustable suspension brackets. Suspension brackets (MNTS TL1 1-R250) to be ordered separately.
Connection	Two holes Ø20.5 mm with rubber grommet on top, and two knock outs Ø20.5 mm in each end. One 5-way push in terminal block, 2 x 2.5 mm ² .
Remarks	Variants for adaption to panel ceiling available on request. Emergency battery box to be ordered separately.


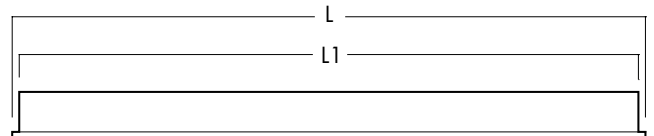


Cut out measure for solid ceiling
 1200/1400 = 285 x 630 (W x L)
 2400/2800 = 285 x 1240 (W x L)
 For Damp/Dan M300 = only length



Cut out measure
 external battery box Ø128

Spare Parts/Accessories

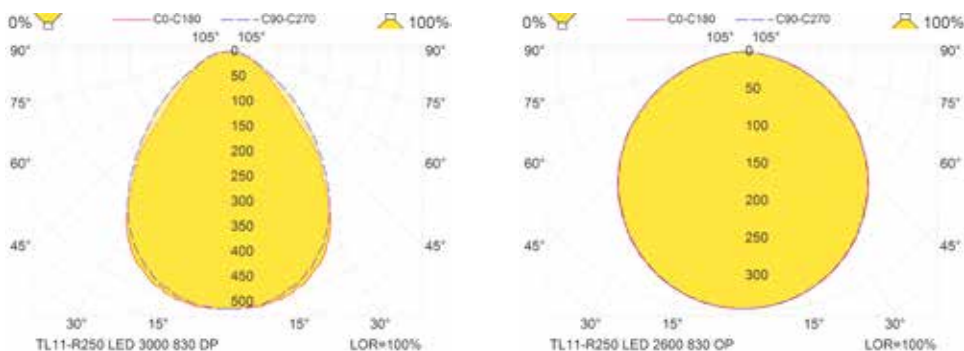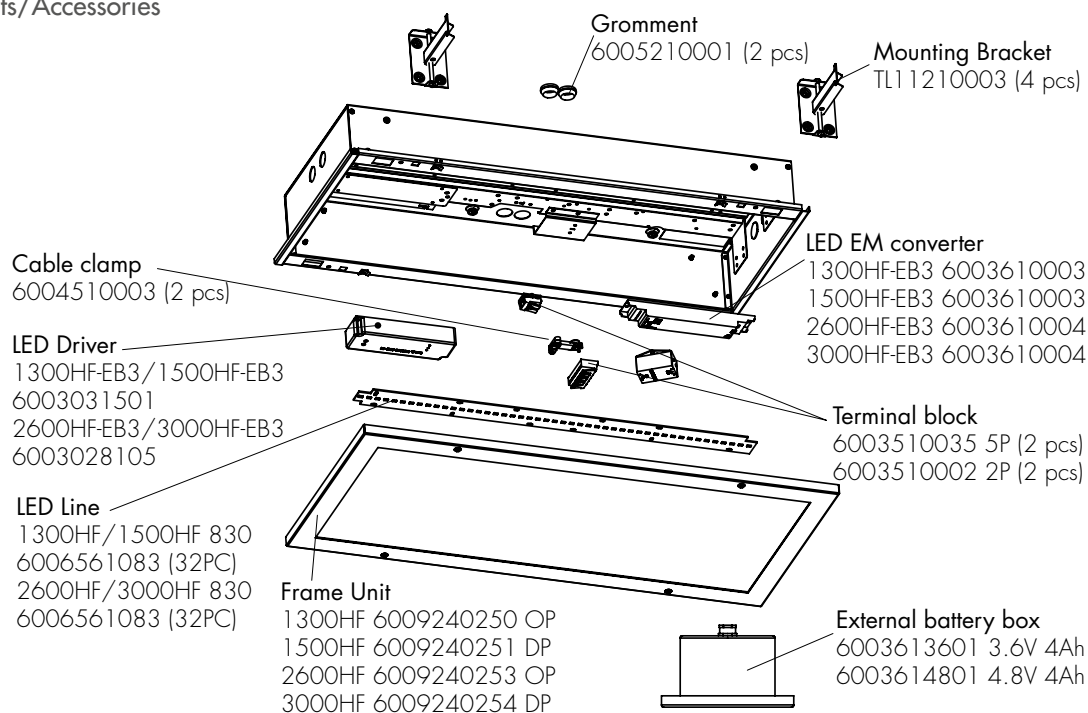

Product	HF	HFD α	HF-EB3	HF-EB3	L	L1	Weight	Weight HF-EB	Lamp code
	100/240V	220/240V	220/240V	120V	mm	mm	HF/HFD α	220/240V 120V	
TL11-R250 LED 1500 830 DP	TL25283111	TL25283201	TL25283401	TL25283411	670	625	5	5.1 6.1	LED
TL11-R250 LED 1300 830 OP	TL25283102	TL25283202	TL25283402	TL25283412	670	625	5	5.1 6.1	LED
TL11-R250 LED 3000 830 DP	TL25483101	TL25483201	TL25483401	TL25483411	1280	1236,5	8.6	8.8 10.6	LED
TL11-R250 LED 2600 830 OP	TL25483102	TL25483202	TL25483402	TL25483412	1280	1236,5	8.6	8.8 10.6	LED

Accessories	Part-No.	
TL11-R EB3 battery box 1200/1400 3.6V 4Ah	6003613601	1.39
TL11-R EB3 battery box 2400/2800 4.8V 4Ah	6003614801	1.52
MNTS TL11-R250	TL11210003	

Complete assortment on www.glamox.com/gmo